



UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

1614.1006

First Named Inventor or Application Identifier:

Nobuhito FUKUI et al.

Express Mail Label No.

J-574 U.S. PTO
09/435642

11/09/99

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: **Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231**

1. Fee Transmittal Form
2. Specification, Claims & Abstract [Total Pages: 24]
3. Drawing(s) (35 USC 113) [Total Sheets: 8]
4. Oath or Declaration [Total Pages: 3]
 - a. Newly executed (original or copy)
 - b. Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - i. DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).
5. Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. Microfiche Computer Program (*Appendix*)
7. Nucleotide and/or Amino Acid Sequence Submission (*if applicable, all necessary*)
 - a. Computer Readable Copy
 - b. Paper Copy (identical to computer copy)
 - c. Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. Assignment Papers (cover sheet & document(s))
9. 37 CFR 3.73(b) Statement (*when there is an assignee*) Power of Attorney
10. English Translation Document (*if applicable*)
11. Information Disclosure Statement (IDS)/PTO-1449[X] Copies of IDS Citations
12. Preliminary Amendment
13. Return Receipt Postcard (MPEP 503) (*Should be specifically itemized*)
14. Small Entity Statement(s) Statement filed in prior application, status still proper and desired.
15. Certified Copy of Priority Document(s) (*if foreign priority is claimed*)
16. Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

Continuation Divisional Continuation-in-part (CIP) of prior application No: _____ / _____

18. CORRESPONDENCE ADDRESS

STAAS & HALSEY LLP
Attn: H. J. Staas
700 Eleventh Street, N.W., Suite 500
Washington, DC 20001

Telephone: (202) 434-1500
Facsimile: (202) 434-1501

SPECIFICATION

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN THAT WE, Nobuhito Fukui, a citizen of Japan residing at Inagi-shi, Tokyo, Japan and Yoshihiro Matsubara, a citizen of Japan residing at Kahoku-gun, Ishikawa, Japan have invented certain new and useful improvements in

INFORMATION PROCESSING APPARATUS, DISPLAY CONTROL METHOD AND STORAGE MEDIUM

of which the following is a specification : -

TITLE OF THE INVENTION

INFORMATION PROCESSING APPARATUS, DISPLAY
CONTROL METHOD AND STORAGE MEDIUM

5 BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention generally relates to information processing apparatuses, display control methods and storage mediums, and more particularly 10 to an information processing apparatus having a scroll function for scrolling contents displayed on a screen when creating, referring to and editing a document or an image, a display control method which carries out a scroll process with respect to the 15 displayed contents on the screen, and a computer-readable storage medium which stores a program for causing a computer to carry out the scroll process with respect to the displayed contents on the screen.

2. Description of the Related Art

In information processing apparatuses typified by personal computers, document creating and/or editing apparatuses, image creating and/or editing apparatuses, and document and/or image referring apparatuses such as a World Wide Web (WWW) 20 browser, a scrolling function is frequently used to advance or reverse information to a desired position when creating and/or editing documents or images. For example, when a user is viewing a certain page 25 displayed on a screen when editing a document, the scrolling function can be used to refer to a page which precedes the certain page by several pages. The direction, speed and quantity of the scrolling 30 function can be controlled, for example, by clicking and dragging a button which is displayed on the screen by a pointing device such as a mouse.

However, according to the conventional information processing apparatus, when the user uses

the scrolling function when viewing a certain page displayed on the screen so as to refer to another page, the user must use the scrolling function again in order to return to the certain page. In other 5 words, the user must search for the certain page using the scrolling function, and return to the certain page manually. As a result, there were problems in that it is necessary to carry out a troublesome operation of manually returning to the 10 certain page, and it takes times to return to the certain page.

Furthermore, in a case where the user refer to several pages before returning to the original page, the user may forget the position of 15 the original page. Hence, in a worst case, there was a problem in that the user may not be able to return to the original page.

The problems described above occur when carrying out a process within a single window. 20 However, similar problems also occur in a multi-window system which is capable of simultaneously displaying a plurality of windows. For example, when the user is carrying out a process in a certain window and makes a reference to another window 25 during the process, the user must also use the scrolling function in order to return to the certain window. In other words, in the conventional information processing apparatus, the user must use the scrolling function similarly as described above 30 to manually switch the window and return to the certain window.

SUMMARY OF THE INVENTION

Accordingly, it is a general object of the 35 present invention to provide a novel and useful information processing apparatus, display control method and storage medium, in which the problems

described above are eliminated.

Another and more specific object of the present invention is to provide an information processing apparatus, a display control method and a storage medium, which can eliminate the problems described above by automatically returning a display made on a screen to an original position before a scrolling function is used to create, refer to and/or edit a document and/or an image.

Still another object of the present invention is to provide an information processing apparatus comprising a scrolling section which changes a display on a display screen from a first display region to a second display region by a scrolling process, and a return section which returns the display to the first display region in response to a cancellation of the scrolling process by the scrolling section. According to the information processing apparatus of the present invention, it is possible to automatically return the image display to an original position before a scroll function is used, after using the scroll function when creating, referring to and/or editing a document and/or an image. Hence, the efficiency of the such creating, referring and editing operations is greatly improved.

A further object of the present invention is to provide a display control method for controlling display of information on a display screen, comprising the steps of (a) changing a display on a display screen from a first display region to a second display region by a scrolling process, and (b) returning the display to the first display region in response to a cancellation of the scrolling process. According to the display control method of the present invention, it is possible to automatically return the image display to an

original position before a scroll function is used, after using the scroll function when creating, referring to and/or editing a document and/or an image. Hence, the efficiency of the such creating, 5 referring and editing operations is greatly improved.

Another object of the present invention is to provide a computer-readable storage medium which stores a program for causing a computer to control display of information on a display screen, where 10 the program comprising the steps of (a) changing a display on a display screen from a first display region to a second display region by a scrolling process, and (b) returning the display to the first display region in response to a cancellation of the 15 scrolling process. According to the computer-readable storage medium of the present invention, it is possible to automatically return the image display to an original position before a scroll function is used, after using the scroll function 20 when creating, referring to and/or editing a document and/or an image. Hence, the efficiency of the such creating, referring and editing operations is greatly improved.

Other objects and further features of the 25 present invention will be apparent from the following detailed description when read in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

30 FIG. 1 is a perspective view showing a first embodiment of an information processing apparatus according to the present invention;

FIG. 2 is a system block diagram showing the construction of an important part within a main 35 body of a computer system shown in FIG. 1;

FIG. 3 is a flow chart for explaining the operation of a CPU in the first embodiment;

FIG. 4 is a diagram showing a display image for explaining the operation of the CPU in the first embodiment;

5 FIG. 5 is a diagram showing a display image for explaining the operation of the CPU in the first embodiment;

FIG. 6 is a diagram showing a display image for explaining the operation of the CPU in the first embodiment;

10 FIG. 7 is a diagram showing a display image for explaining the operation of the CPU in the first embodiment;

FIG. 8 is a flow chart for explaining the operation of the CPU in a second embodiment of the
15 information processing apparatus according to the present invention;

FIG. 9 is a diagram showing a display image for explaining the operation of the CPU in the second embodiment;

20 FIG. 10 is a diagram showing a display image for explaining the operation of the CPU in the second embodiment;

FIG. 11 is a diagram showing a display image for explaining the operation of the CPU in the
25 second embodiment; and

FIG. 12 is a diagram showing a display image for explaining the operation of the CPU in the second embodiment.

30 DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 is a perspective view showing a first embodiment of an information processing apparatus according to the present invention. This first embodiment of the information processing apparatus employs a first embodiment of a display control method according to the present invention, and a first embodiment of a storage medium according

to the present invention. In this first embodiment, the information processing apparatus is formed by a general-purpose computer system such as a personal computer.

5 A computer system 100 shown in FIG. 1 includes a main body 101 which includes a CPU, a disk drive unit and the like, a display unit 102 which displays an image on a display screen 102a in response to an instruction from the main body 101, a
10 keyboard 103 which is used to input various information to the computer system 100, a mouse 104 which is used to specify an arbitrary position on the display screen 102a, and a modem 105 which makes access to an external database or the like and
15 downloads a program or the like stored in another computer system. One or more programs are stored in a portable recording medium such as a disk 110 or, are downloaded from a recording medium 106 of another computer system using a communication unit
20 such as the modem 105, and are input to the computer system 100 and installed. The programs include a program for causing the CPU of the computer system 100 to carry out a process which will be described later in conjunction with FIG. 3, for example, in
25 this first embodiment of the information processing apparatus.

The first embodiment of the storage medium according to the present invention stores at least the program for causing the CPU of the computer system 100 to carry out the process which will be described later in conjunction with FIG. 3, for example. The storage medium may be formed by a portable recording medium such as the disk 110 or, any other type of recording medium capable of
30 storing one or more programs. For example, the recording medium usable as the storage medium
35 includes semiconductor memory devices such as RAMs

and ROMs, disks such as magnetic, optical and magneto-optical disks, CD-ROMs, IC memory cards, and recording mediums accessible by a computer system which is coupled via a communication unit or a 5 communication means such as a modem and a LAN. The storage medium is not limited to a portable recording medium.

FIG. 2 is a system block diagram showing an important part of the main body 101. The main 10 body 101 shown in FIG. 2 includes a CPU 201 which carries out the process which will be described later in conjunction with FIG. 3, for example, a memory part 202 which is made up of a RAM, ROM or the like, a disk drive 203 which is capable of 15 reading information from and writing information to the disk 110, and a hard disk drive 204 which are coupled via a bus 200. Although not shown in FIG. 2, the display unit 102, the keyboard 103, the mouse 103 and the like are also coupled to the CPU 201.

20 Of course, the construction of the computer system 100 is not limited to that shown in FIGS. 1 and 2, and various other known constructions may be used instead.

FIG. 3 is a flow chart for explaining the 25 operation of the CPU 201 in the first embodiment. In FIG. 3, a step S1 waits for a user input from the keyboard 103 or the mouse 104, and the process advances to a step S2 when the user input is detected. In a state where the process advances to 30 the step S2, a display image shown in FIG. 4, for example, is displayed on the display screen 102a of the display unit 102. In the following description, the "display image" refers to the contents displayed on the display screen 102a of the display unit 102, 35 and not to the display screen 102a itself.

In FIG. 4, the display image includes an editing region (client region) 1, a leftwardly

pointing arrow button 3, a rightwardly pointing arrow button 4, an upwardly pointing arrow button 5, a downwardly pointing arrow button 6, a horizontal scroll box 7, a vertical scroll box 8, a window frame 9, a mouse pointer 10, a menu 11, a tool button 12, a cursor 19 and the like.

The step S2 decides whether or not to refer to an editing position outside the display image, from on a present editing position. The process returns to the step S1 if the decision result in the step S2 is NO. On the other hand, if the decision result in the step S2 is YES, a step S3 decides whether or not a mark 2 is displayed at the present editing position in the display image. If the decision result in the step S3 is NO, a step S4 decides whether or not the mark 2 is to be set in the display image. The process returns to the step S1 if the decision result in the step S4 is NO. If the decision result in the step S4 is YES, a step S5 sets the mark 2 at an arbitrary reference position in the display image by operating the menu 11 or the tool button 12 by the mouse 104 or, by making a key operation using function keys and the like of the keyboard 103. After the step S5 sets the mark 2 at the arbitrary reference position in the display image, the process returns to the step S1.

The mark 2 is set to the reference position where the user wishes to return to after the user carries out a scrolling process. For example, the mark 2 is set to the reference position shown in FIG. 5. FIG. 5 is a diagram showing a state where the mark 2 is set in the display image. In FIG. 5, those parts which are the same as those corresponding parts in FIG. 4 are designated by the same reference numerals, and a description thereof will be omitted. Of course, the mark 2 may be set manually or automatically to the present position of

the cursor 19 which indicates the present editing position. In addition, the mark 2 may be set at a top position of the display image.

If the decision result in the step S3 is YES, a step S6 decides whether or not the scrolling process is to be carried out. The process returns to the step S1 if the decision result in the step S6 is NO. If the decision result in the step S6 is YES, a step S7 carries out the scrolling process. The scrolling process itself is known, and the scrolling process is not limited to a specific type of scrolling process. For example, an upward scroll may be made by moving the mouse pointer 10 onto the vertical scroll box 8 and carrying out a dragging process in the direction of the upwardly pointing arrow button 5 or, by moving the mouse pointer 10 onto the upwardly pointing arrow button 5 and continuously clocking the mouse 104. Similarly, a downward scroll may be made by moving the mouse pointer 10 onto the vertical scroll box 8 and carrying out a dragging process in the direction of the downwardly pointing arrow button 6 or, by moving the mouse pointer 10 onto the downwardly pointing arrow button 6 and continuously clocking the mouse 104. In addition, the scrolling process may be made by operating scroll keys of the keyboard 103. When the scrolling process is carried out, the display image assumes a state shown in FIG. 6, for example. FIG. 6 is a diagram showing a state where the downward scroll is made in the state shown in FIG. 5. In FIG. 6, those parts which are the same as those corresponding parts in FIG. 4 are designated by the same reference numerals, and a description thereof will be omitted.

During the scrolling process, the edited characters and images which are newly displayed move in the scrolling direction, while at the same time,

the mark 2 and the edited characters and images which were displayed before the scrolling process move in a direction opposite to the scrolling direction. Accordingly, when the downward scroll 5 is made as shown in FIG. 6, the mark 2 moves in the same direction as an upward scroll.

A step S8 decides whether or not a reference is made to an editing position other than the present editing position by the scrolling 10 process. The process returns to the step S7 if the decision result in the step S8 is NO. On the other hand, if the decision result in the step S8 is YES, a step S9 carries out a scroll cancel process. The scroll cancel process itself is also known. For 15 example, the scroll cancel process may be made by releasing the mouse button during the dragging process or, releasing the scroll key. In this embodiment, it is assumed for the sake of convenience that a dragging process is made with 20 respect to the vertical scroll box 8 up to the position shown in FIG. 6.

A step S10 automatically returns the editing position to a position so that the mark 2 is located at an uppermost end position within the 25 window frame 9, for example. When the editing position is automatically returned, the vertical scroll box 8 and the like are also returned to positions corresponding to the reference position of the mark 2. As a result, the display image is 30 returned to the editing position shown in FIG. 7. FIG. 7 is a diagram showing a state where the downward scroll is cancelled in the state shown in FIG. 6. In FIG. 7, those parts which are the same 35 as those corresponding parts in FIG. 4 are designated by the same reference numerals, and a description thereof will be omitted.

When returning the editing position back

to the original editing position, the mark 2 may be automatically returned to a position other than the uppermost end position or, may be returned to the reference position shown in FIG. 5. All that is
5 required when returning the editing position back to the original editing position is that the editing position is automatically returned to a position near the original editing position where the mark 2 is displayed, and it is not essential for the
10 editing position after the return to perfectly match the original editing position.

Next, a description will be given of a second embodiment of the information processing apparatus according to the present invention. This
15 second embodiment of the information processing apparatus employs a second embodiment of the display control method according to the present invention, and a second embodiment of the storage medium according to the present invention. In this second
20 embodiment, the information processing apparatus is also formed by a general-purpose computer system such as a personal computer. The basic construction of the hardware of this second embodiment of the information processing apparatus may be the same as
25 the hardware construction described above in conjunction with FIGS. 1 and 2, and the illustration and description of the basic construction of the hardware of this second embodiment will be omitted.

FIG. 8 is a flow chart for explaining the
30 operation of the CPU 201 in the second embodiment. In FIG. 8, a step S21 waits for the user input from the keyboard 103 or the mouse 104, and the process advances to a step S22 when the user input is detected. In a state where the process advances to
35 the step S22, a display image shown in FIG. 9, for example, is displayed on the display screen 102a of the display unit 102.

In FIG. 9, the display image includes an editing region (client region) 1, an upwardly pointing arrow button 5, a downwardly pointing arrow button 6, a vertical scroll box 8, a window frame 9, 5 a mouse pointer 10, a menu 11, a tool button 12, a cursor 19, windows 13 and 14 and the like.

The step S22 decides whether or not to refer to a window at an editing position outside the display image, from a present active window at a 10 present editing position. The process returns to the step S21 if the decision result in the step S22 is NO. For the sake of convenience, it is assumed that the present active window is the window 13 shown in FIG. 9, and that the window to be referred 15 to is the window 14 shown in FIG. 9. On the other hand, if the decision result in the step S22 is YES, a step S23 decides whether or not a mark 2 is displayed in the present active window 13 in the display image. If the decision result in the step 20 S23 is NO, a step S24 decides whether or not the mark 2 is to be set in the display image. The process returns to the step S21 if the decision result in the step S24 is NO. If the decision result in the step S24 is YES, a step S25 sets the 25 mark 2 at an arbitrary reference position in the display image by operating the menu 11 or the tool button 12 by the mouse 104 or, by making a key operation using function keys and the like of the keyboard 103. After the step S25 sets the mark 2 at the arbitrary reference position in the display 30 image, the process returns to the step S21. The arbitrary reference position in the display image corresponds to a position within an arbitrary window, and in this particular case, the arbitrary reference 35 position is located within the active window 13.

The mark 2 is set to the reference position within the window where the user wishes to

return to after the user carries out a scrolling process. For example, the mark 2 is set to the reference position shown in FIG. 10. FIG. 10 is a diagram showing a state where the mark 2 is set in
5 the display image. In FIG. 10, those parts which are the same as those corresponding parts in FIG. 9 are designated by the same reference numerals, and a description thereof will be omitted. Of course, the mark 2 may be set manually or automatically to the
10 present position of the cursor 19 which indicates the present editing position within the active window 13. In addition, the mark 2 may be set at a top position of the display image, that is, at the top position of the active window 13.

15 If the decision result in the step S23 is YES, a step S26 decides whether or not the scrolling process is to be carried out. The process returns to the step S21 if the decision result in the step S26 is NO. If the decision result in the step S26
20 is YES, a step S27 carries out the scrolling process.

 In this embodiment, the scrolling process refers to the following process. Generally, in the multi-window system such as that used in this embodiment, a priority sequence of the display of
25 the windows is managed, and the overlapping display of the windows is controlled depending on the priority sequence. In other words, the window which is displayed at the frontmost position has the highest priority sequence.

30 By using this priority sequence information of the windows, a control is carried out to display a window having a priority sequence which is next lowest to that of the window which is presently displayed at the frontmost position, when
35 the downward scroll is instructed. On the other hand, when the upward scroll is instructed, a control is carried out to display a window having a

priority sequence which is next highest to that of the window which is presently displayed at the frontmost position.

In the normal switching of the windows,
5 the priority sequence of the windows changes. However, during this scrolling process, the priority sequence information of the window at the time when the scroll process is started is held, and the held priority sequence information is used to switch the
10 window which is displayed at the frontmost position.

When the scrolling process described above is carried out, the display image assumes a state shown in FIG. 11, for example. FIG. 11 is a diagram showing a state where the upward scroll is made in
15 the state shown in FIG. 10 until the window 14 becomes active. In FIG. 11, those parts which are the same as those corresponding parts in FIG. 10 are designated by the same reference numerals, and a description thereof will be omitted.

20 A step S28 decides whether or not a reference is made to a window other than the present active window 13, that is, an editing position other than the present editing position, by the scrolling process. The process returns to the step S27 if the
25 decision result in the step S28 is NO. On the other hand, if the decision result in the step S28 is YES, a step S29 carries out a scroll cancel process. The scroll cancel process itself is known, as described above. For example, the scroll cancel process may
30 be made by releasing the mouse button during the dragging process or, releasing the scroll key. In this embodiment, it is assumed for the sake of convenience that a dragging process is made with respect to the vertical scroll box 8 up to the
35 position shown in FIG. 11.

A step S30 automatically returns the editing position to a position so that the window 13

in which the mark 2 is displayed becomes active. That is, the editing position is automatically returned to the position where the window 13 is displayed at the frontmost position in the display image, depending on the priority sequence of the windows at the time when the scrolling process described above is started. When the editing position is automatically returned, the vertical scroll box 8 and the like are also returned to positions corresponding to the reference position of the mark 2. As a result, the display image is returned to the editing position shown in FIG. 12. FIG. 12 is a diagram showing a state where the downward scroll is cancelled in the state shown in FIG. 11. In FIG. 12, those parts which are the same as those corresponding parts in FIG. 9 are designated by the same reference numerals, and a description thereof will be omitted.

The second embodiment of the storage medium according to the present invention stores at least the program for causing the CPU 201 of the computer system 100 to carry out the process described above in conjunction with FIG. 8. The storage medium may be formed by a portable recording medium such as the disk 110 or, any other type of recording medium capable of storing one or more programs. For example, the recording medium usable as the storage medium includes semiconductor memory devices such as RAMs and ROMs, disks such as magnetic, optical and magneto-optical disks, CD-ROMs, IC memory cards, and recording mediums accessible by a computer system which is coupled via a communication unit or a communication means such as a modem and a LAN. The storage medium is not limited to a portable recording medium.

In each of the embodiments described above, the mark 2 which is once set may be deleted by an

operation which reverses the operation carried out at the time when the mark 2 is set, if the mark 2 is no longer necessary. In addition, an internal timer of the CPU 201 may be utilized to automatically 5 delete the mark 2 after a predetermined time elapses from the time when the mark 2 is set. The mark 2 may also be deleted automatically when a file is closed. Furthermore, when a new mark is set in a state where the mark 2 is already set at another 10 position, it is also possible to automatically delete the mark 2 which is already set when the new mark is set.

Moreover, in each of the embodiments described above, when the region on the display 15 screen 102a on which the display is made is changed from a first display region to a second display region and the display is to be returned to the first display region in response to the scroll cancel process, the second display region may of 20 course include display contents other than those of the first display region or include display contents which partially include the display contents of the first display region.

The present invention is applied to the 25 computer system such as the personal computer, in each of the embodiments described above. However, the present invention is similarly applicable to various kinds of information processing apparatuses, including document creating and/or editing 30 apparatuses, image creating and/or editing apparatuses, document and/or image referring apparatuses such as a WWW browser, and work stations. In addition, the information processing apparatus is not limited to the desk-top type, and the present 35 invention is of course applicable to portable type information processing apparatuses such as lap-top personal computers.

Further, the present invention is not limited to these embodiments, but various variations and modifications may be made without departing from the scope of the present invention.

5

10

15

20

25

30

35

WHAT IS CLAIMED IS

5

1. An information processing apparatus comprising:

a scrolling section which changes a display on a display screen from a first display region to a
10 second display region by a scrolling process; and
a return section which returns the display to said first display region in response to a cancellation of the scrolling process by said scrolling section.

15

2. The information processing apparatus
20 as claimed in claim 1, wherein both said first display region and said second display region are displayed within a single window which is displayed on the display screen.

25

3. The information processing apparatus as claimed in claim 1, wherein said first display
30 region is formed by one window within a multi-window which includes a plurality of windows, and said second display region is formed by another window within said multi-window.

35

4. The information processing apparatus
as claimed in claim 1, which further comprises:
a setting section which sets a mark indicating
said first display region.

5

5. The information processing apparatus
10 as claimed in claim 4, wherein said return section
displays said first display region at a position
where said mark is displayed on the display screen.

15

6. The information processing apparatus
as claimed in claim 5, wherein said first display
region is formed by a window within a multi-window
20 which includes a plurality of windows, said second
display region is formed by another window within
said multi-window, and said return section displays
said first display region at a position where said
one window including the mark is displayed at a
25 frontmost position on the display screen.

30 7. The information processing apparatus
as claimed in claim 4, wherein said setting section
sets the mark at a position of a cursor in said
first display region.

35

8. A display control method for controlling display of information on a display screen, comprising the steps of:

- 5 (a) changing a display on a display screen from a first display region to a second display region by a scrolling process; and
- (b) returning the display to said first display region in response to a cancellation of the scrolling process.

10

15 9. The display control method as claimed in claim 8, wherein both said first display region and said second display region are displayed within a single window which is displayed on the display screen.

20

25 10. The display control method as claimed in claim 8, wherein said first display region is formed by one window within a multi-window which includes a plurality of windows, and said second display region is formed by another window within said multi-window.

30

35 11. The display control method as claimed in claim 8, which further comprises the steps of:
(c) setting a mark indicating said first display region.

12. The display control method as claimed in claim 11, wherein said step (b) displays said first display region at a position where said mark is displayed on the display screen.

5

13. The display control method as claimed in claim 12, wherein said first display region is formed by a window within a multi-window which includes a plurality of windows, said second display region is formed by another window within said multi-window, and said step (b) displays said first display region at a position where said one window including the mark is displayed at a frontmost position on the display screen.

20

14. The display control method as claimed in claim 11, wherein said step (c) sets the mark at a position of a cursor in said first display region.

25

15. A computer-readable storage medium which stores a program for causing a computer to control display of information on a display screen, said program comprising the steps of:

- (a) changing a display on a display screen from a first display region to a second display region by a scrolling process; and
- (b) returning the display to said first display region in response to a cancellation of the

scrolling process.

5

16. The computer-readable storage medium
as claimed in claim 15, wherein both said first
display region and said second display region are
displayed within a single window which is displayed
10 on the display screen.

15

17. The computer-readable storage medium
as claimed in claim 15, wherein said first display
region is formed by one window within a multi-window
which includes a plurality of windows, and said
second display region is formed by another window
20 within said multi-window.

25

18. The computer-readable storage medium
as claimed in claim 15, wherein the program further
comprises the steps of:

(c) setting a mark indicating said first
display region.

30

35

19. The computer-readable storage medium
as claimed in claim 18, wherein said step (b)
displays said first display region at a position
where said mark is displayed on the display screen.

20. The computer-readable storage medium
as claimed in claim 19, wherein said first display
region is formed by a window within a multi-window
which includes a plurality of windows, said second
5 display region is formed by another window within
said multi-window, and said step (b) displays said
first display region at a position where said one
window including the mark is displayed at a
frontmost position on the display screen.

10

21. The computer-readable storage medium
15 as claimed in claim 18, wherein said step (c) sets
the mark at a position of a cursor in said first
display region.

20

25

30

35

ABSTRACT OF THE DISCLOSURE

An information processing apparatus includes a scrolling section which changes a display on a display screen from a first display region to a second display region by a scrolling process, and a return section which returns the display to the first display region in response to a cancellation of the scrolling process by the scrolling section.

10

15

20

25

30

35

FIG.1


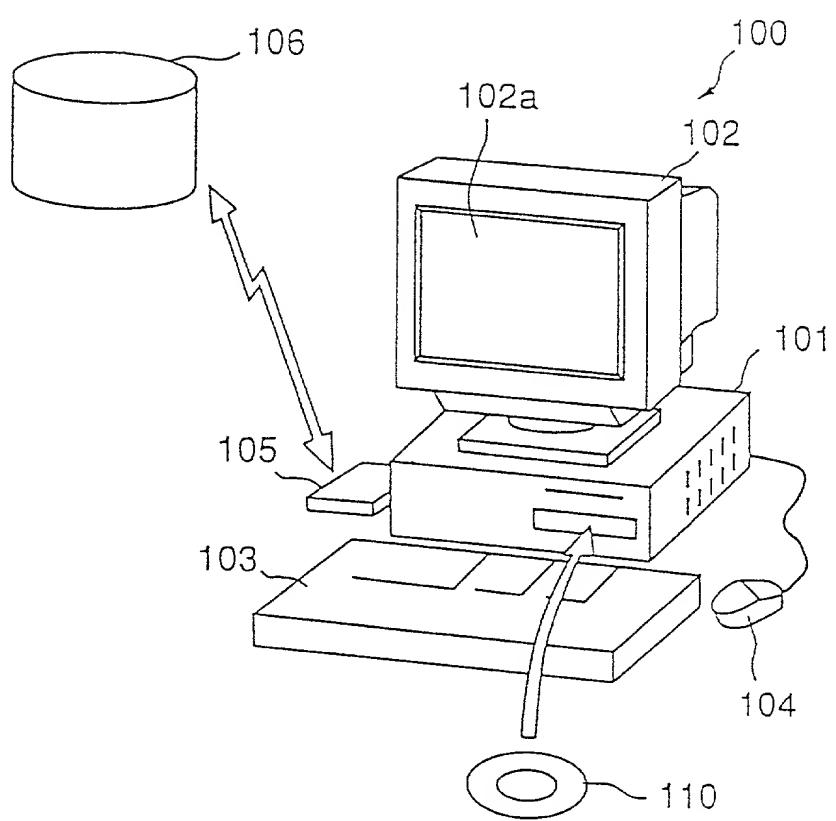


FIG.2

1 0 1

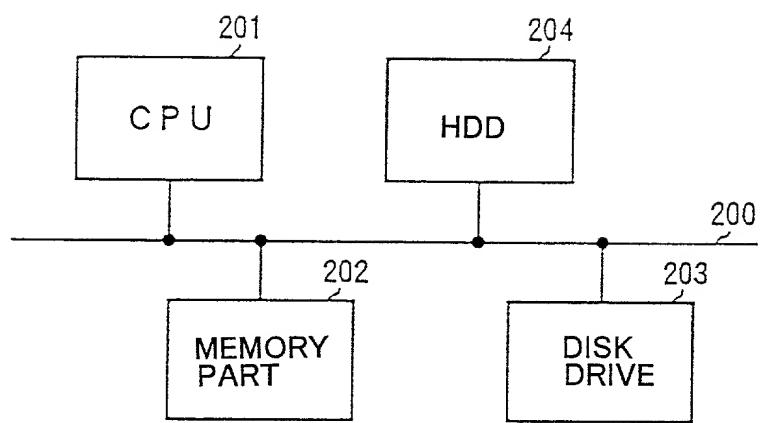

F I G. 3

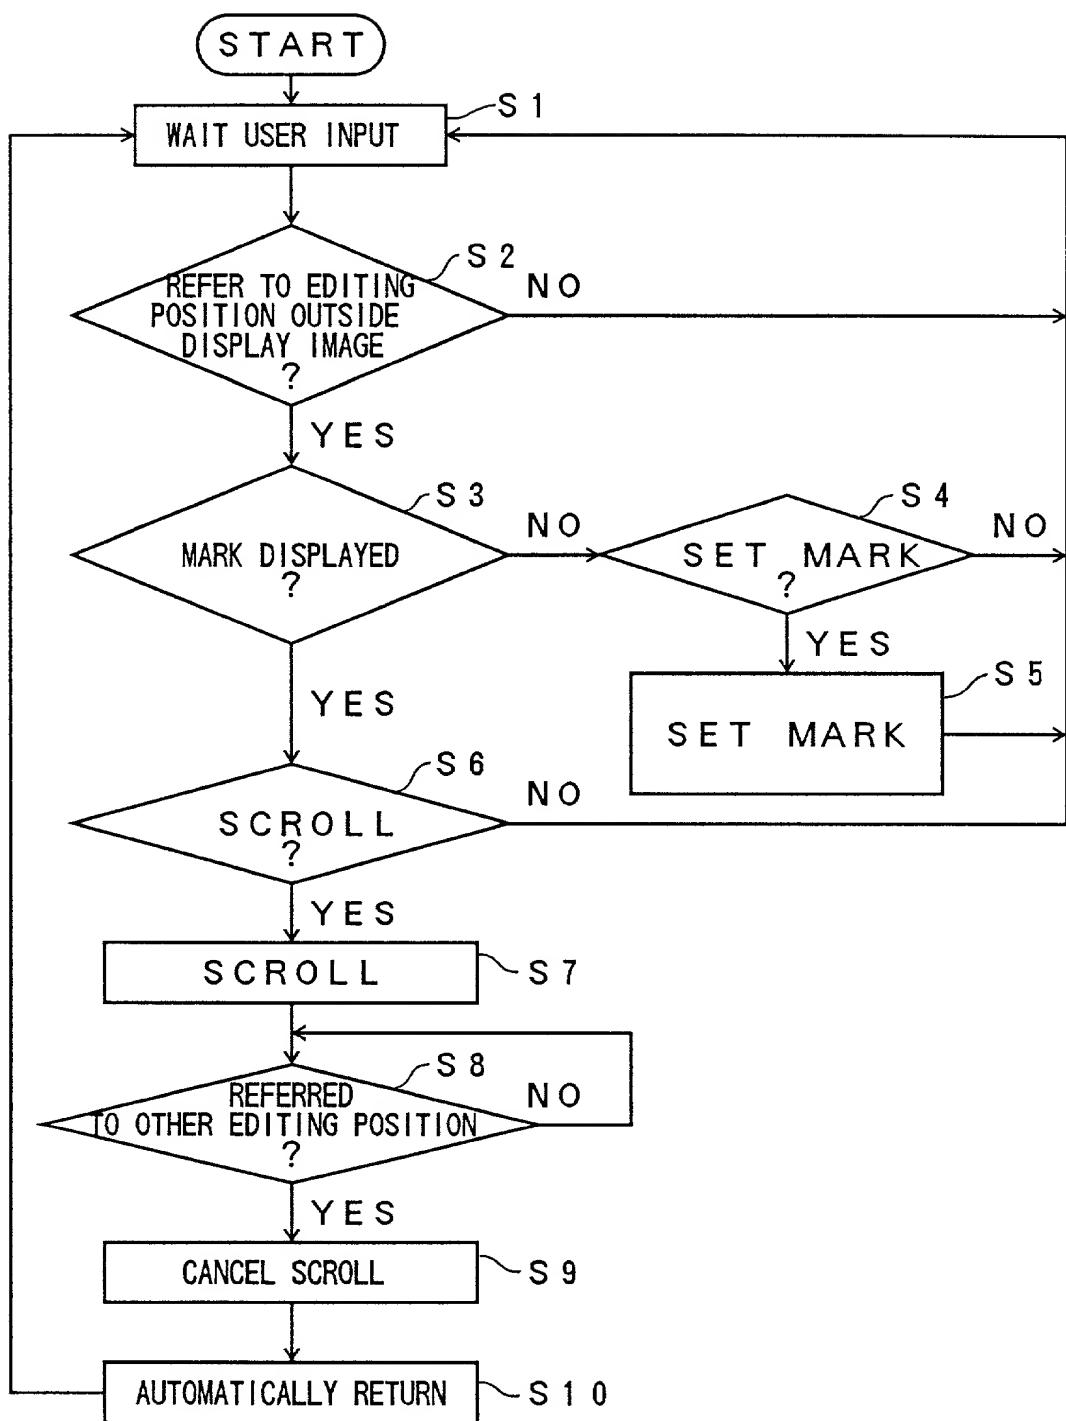


FIG.4

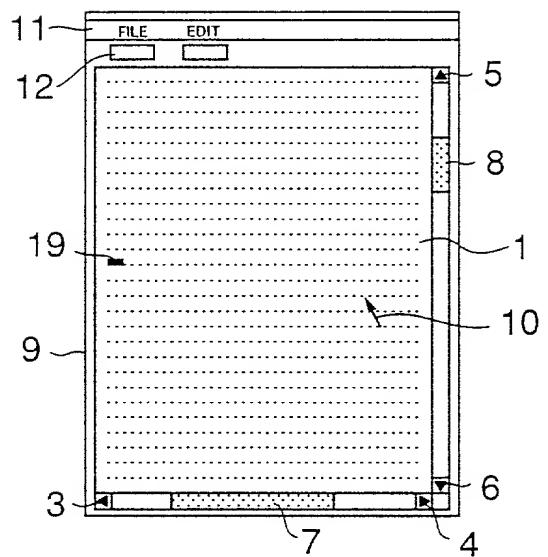


FIG.5

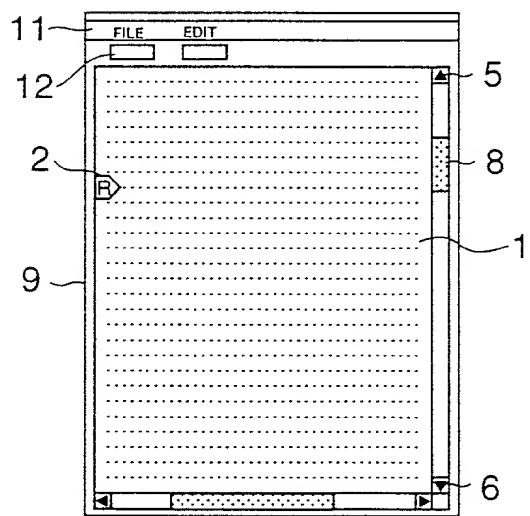


FIG.6


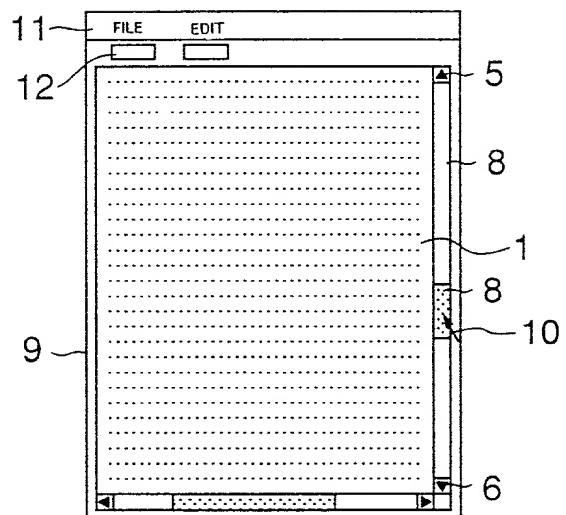


FIG.7

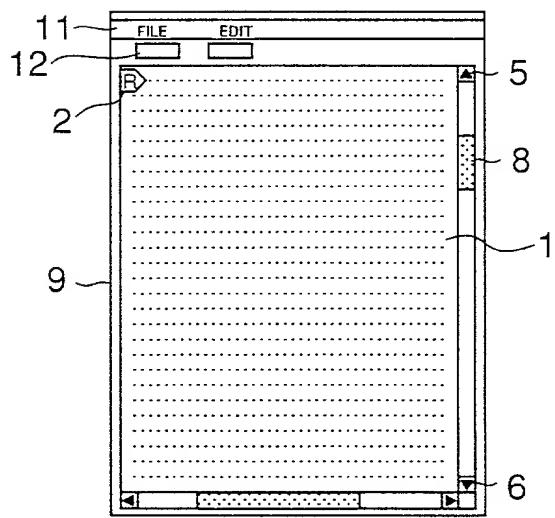

F I G. 8

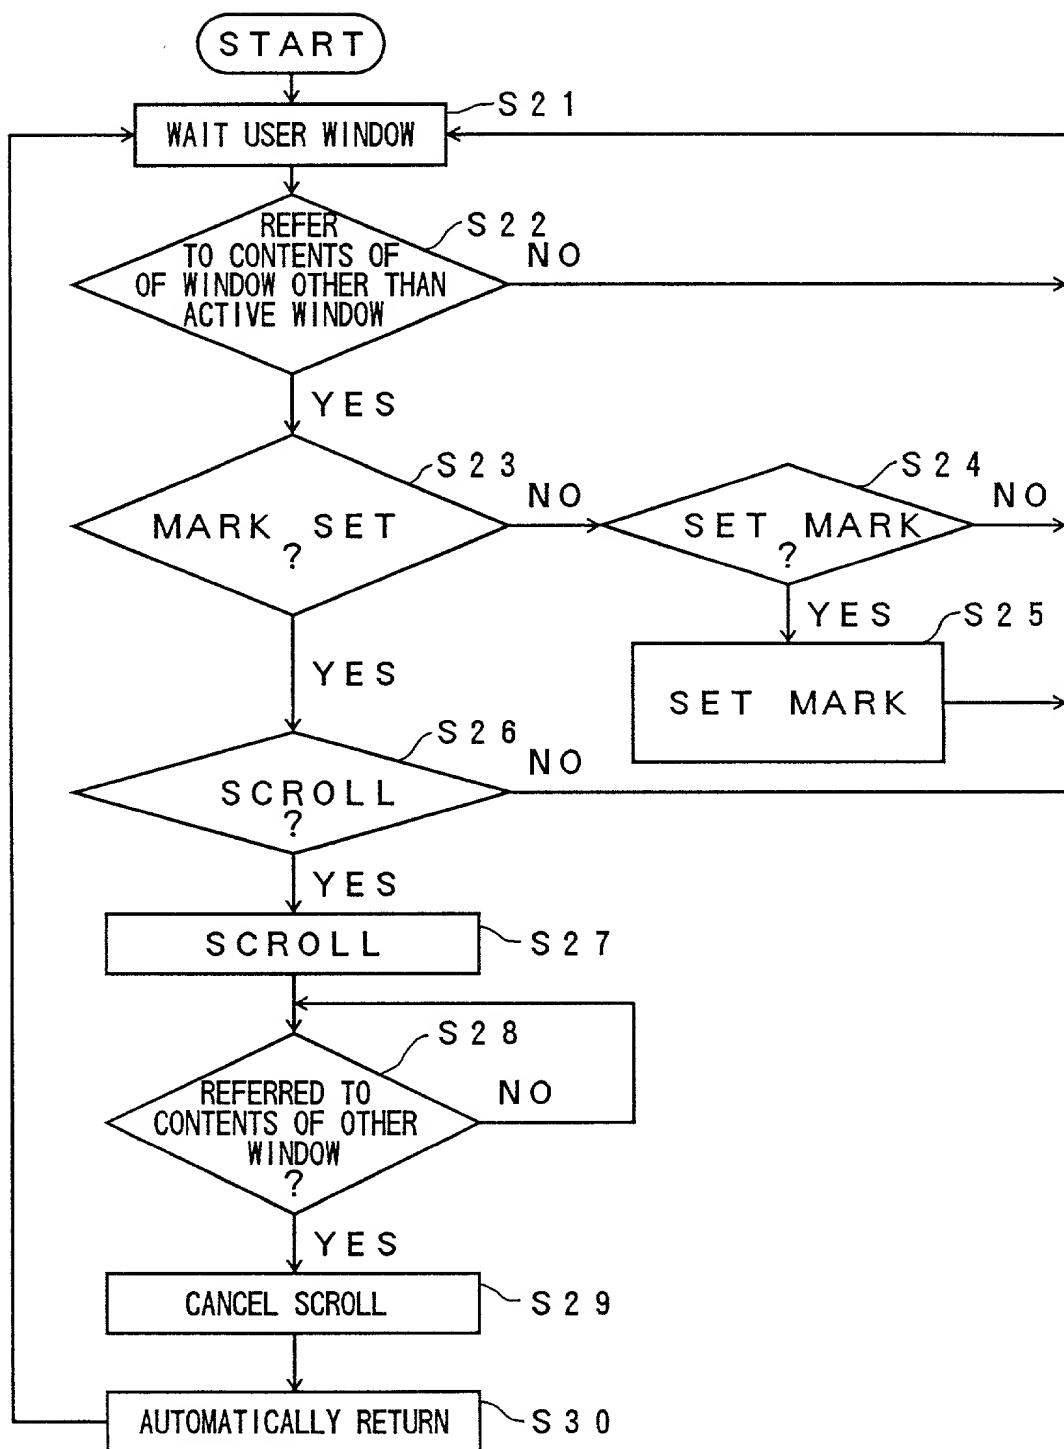


FIG.9

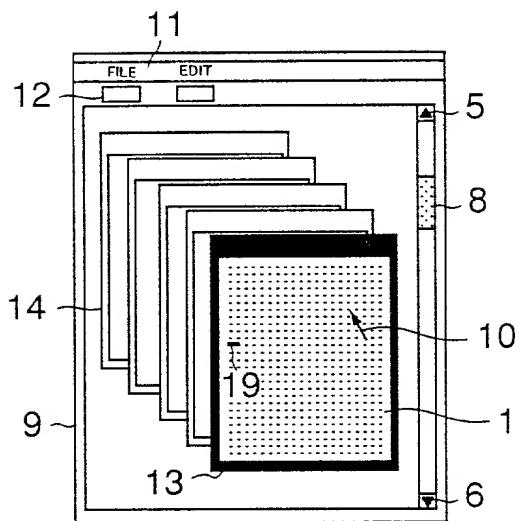


FIG.10

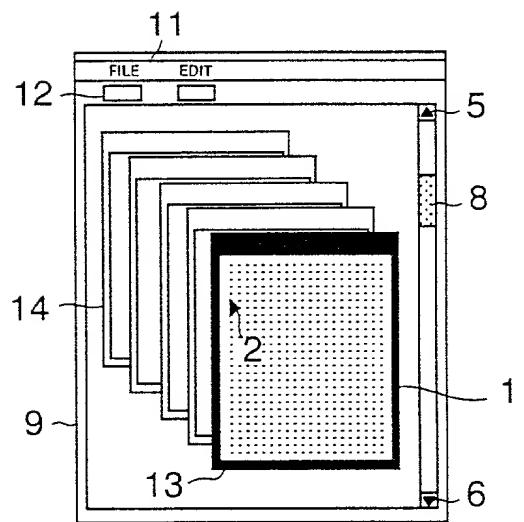


FIG.11


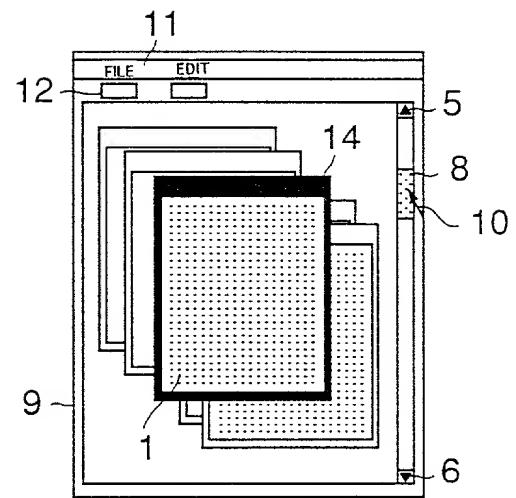


FIG.12

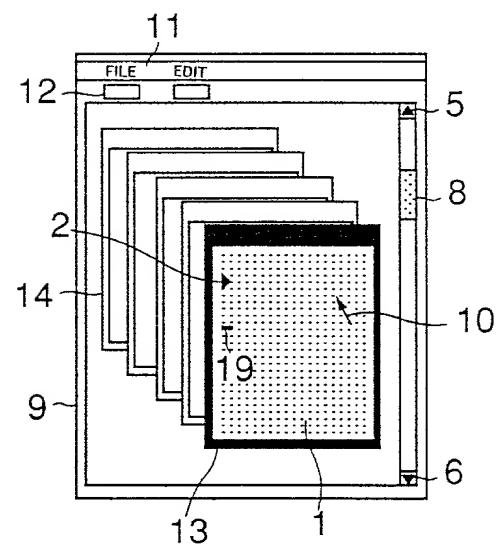

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application**特許出願宣言書及び委任状****Japanese Language Declaration****日本語宣言書**

下の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

INFORMATION PROCESSING APPARATUS,**DISPLAY CONTROL METHOD AND STORAGE****MEDIUM**

the specification of which is attached hereto unless the following box is checked:

- 一月____日に提出され、米国出願番号または特許協定条約国際出願番号を_____とし。
(該当する場合) _____に訂正されました。

was filed on _____
as United States Application Number or
PCT International Application Number
and was amended on _____
(if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基き下記の、米国以外の国の少なくとも一ヵ国を指定している特許協力条約365条(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s) (Patent Application)

外国での先行出願

No.11-096182

(Number)
(番号)

Japan

(Country)
(国名)

(Number)
(番号)

(Country)

(国名)

私は、第35編米国法典119条(e)項に基いて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基いて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)(Filing Date)
(出願日)

(Application No.)
(出願番号)(Filing Date)
(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じるところに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方ににより处罚されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣言を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし



2/April/1999

(Day/Month/Year Filed)

(出願年月日)



(Day/Month/Year Filed)

(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)

(出願番号)

(Filing Date)

(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, Insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)
(現況: 特許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)
(現況: 特許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の手続を米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。（弁護士、または代理人の氏名及び登録番号を明記のこと）

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358; William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938; Michael C. Soldner, 41,455; Norman L. Ourada, 41,235; Kevin R. Spivak, P-43,148; and William M. Schertler, 35,348 (agent)

書類送付先

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358; William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938; Michael C. Soldner, 41,455; Norman L. Ourada, 41,235; Kevin R. Spivak, P-43,148; and William M. Schertler, 35,348 (agent)

Send Correspondence to:

STAAS & HALSEY
700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001

直接電話連絡先：（名前及び電話番号）

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
(202) 434-1500

唯一または第一発明者名		Full name of sole or first inventor	
		Nobuhito Fukui	
発明者の署名	日付	Inventor's signature	Date
		Nobuhito Fukui	
住所	Residence Inagi-shi, Tokyo, Japan		
国籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU PERSONAL COMPUTER SYSTEMS LIMITED, 1405, Ooaza Oomaru, Inagi-shi, Tokyo, 206-0801 Japan		
第二共同発明者	Full name of second joint inventor, if any Yoshihiro Matsubara		
第二共同発明者	日付	Second inventor's signature	Date
		Yoshihiro Matsubara	
住所	Residence Kahoku-gun, Ishikawa, Japan		
国籍	Citizenship Japan		
私書箱	Post Office Address c/o PFU LIMITED, Nu-98-2, Aza Uno-ke, Uno-ke-machi, Kahoku-gun, Ishikawa, 929-1192 Japan		

(第三以降の共同発明者についても同様に記載し、署名をすること)
(Supply similar information and signature for third and subsequent joint inventors.)